



DO's



DON'Ts

LPG SAFETY TIPS



Always keep cylinder connected to manifold.



Before connecting check for leakage.



Always keep cylinder vertical, upright, during usage and storage.



Put safety caps on all the cylinders, whether filled or empty.




Always keep a fire extinguisher in the vicinity of cylinder.



Non sparking tools should be used in the maintenance of manifold.



Always install LPG pipeline above ground level.

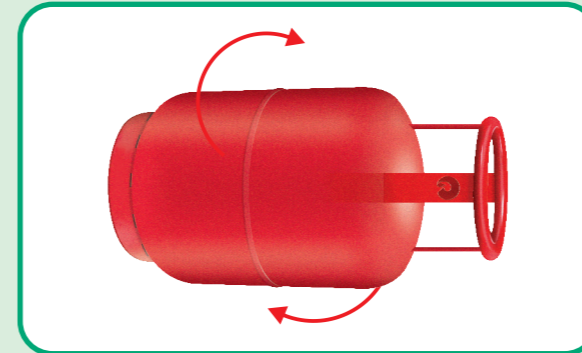


Do not roll the cylinder.



Don't use cigarette/ incense/match stick in LPG manifold area.



Don't use flexible hose for LPG under high temperature. Use only copper pigtail.

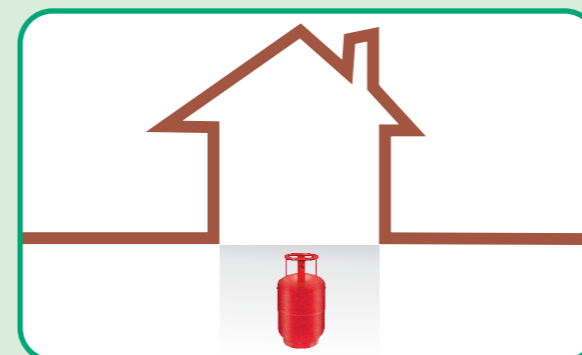


Never store or use LPG cylinders in basement or cellar.




Do not use electrical appliances in and around LPG storage / manifold area.



Avoid use of mobile or camera flash in manifold area. Use flameproof torch.

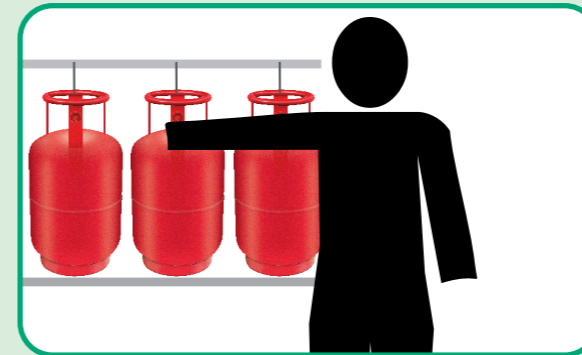

Do not allow entry of unauthorised persons in manifold area.

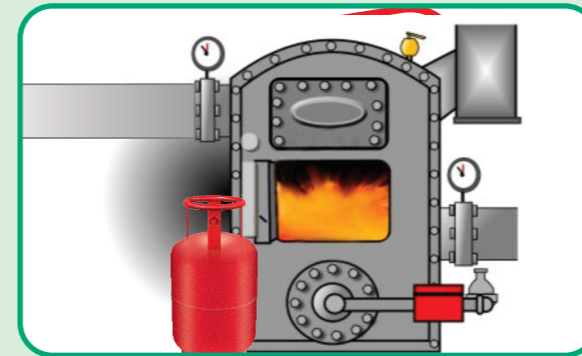

Never store or use LPG cylinders near chimney, boiler or furnace.

In case of Gas leakage

- Place safety cap on cylinder valve immediately and take it to an isolated place
- Do not switch On / Off any electrical fitting
- Close the regulator on cylinder
- In case of leakage from manifold pipeline, quickly shut the LPG supply and call trained safety personnel or authorised Dealer
- In case of Fire, shout for help and contact your Distributor/ DO



Reliance Gas

Service you can trust ... today, everyday

Reliance Gas Helpline No.: 9725580550 / 9004063408 | Distributor / DO No.: